

## HENKOVAC TABLE TOPS:

BEST CHOICE FOR RESTAURANTS, HOSPITALITY INDUSTRY, FOOD VENDORS AND CATERERS.

Our 4 table top machines have all the quality engineering and build of our industrial vacuum machines.

"PLUG & PLAY"



TABLE TOP RANGE  
T2, T3, T4



Liquid insert plate



CABINET FOR  
T2, T3 & T4

### SPECIFICATIONS TABLE TOPS

Transparent cover & stainless steel chamber

|                     | SEAL LENGTH | MAX. PRODUCT HEIGHT | USEFUL CHAMBER SIZE (wxDxH) | OUTSIDE DIMENSION (wxDxH) | STANDARD VOLTAGE* | POWER CONSUMPTION | WEIGHT |
|---------------------|-------------|---------------------|-----------------------------|---------------------------|-------------------|-------------------|--------|
| TABLE TOP <b>T2</b> | 270         | 100                 | 270 x 310 x 100/140**       | 365 x 500 x 300/340**     | 230-1-50 Hz       | 0,4/0,5 kw        | 25 kg  |
| TABLE TOP <b>T3</b> | 320         | 160                 | 320 x 330 x 160             | 430 x 550 x 410           | 230-1-50 Hz       | 0,5/0,7 kw        | 50 kg  |
| TABLE TOP <b>T4</b> | 420         | 180                 | max. 420 x 370 x 180        | 530 x 590 x 460           | 230-1-50 Hz       | 0,7/1,3 kw        | 60 kg  |
| TABLE TOP <b>T5</b> | 320         | 95                  | 800 x 320 x 95              | 985 x 515 x 430           | 230-1-50 Hz       | 1,3 kw            | 115 kg |

Dimensions in mm \*Machines can be supplied with all world wide voltages applicable

### OPTIONS TABLE TOPS

|                       | DIGITAL TIME CONTROL | SENSOR CONTROL          | SEAL         | SEAL CONFIGURATION | GAS | PUMP CAPACITY M <sup>3</sup> | CYCLE TIME |
|-----------------------|----------------------|-------------------------|--------------|--------------------|-----|------------------------------|------------|
| TABLE TOP <b>T2**</b> | 1 program            | x                       | Single       | L                  | x   | 4 or 8 m <sup>3</sup>        | 20-40 sec  |
| TABLE TOP <b>T3</b>   | 1 or 10 programs     | sensor/H <sub>2</sub> O | Double/CC*** | L                  | gas | 8 or 16 m <sup>3</sup>       | 20-30 sec  |
| TABLE TOP <b>T4</b>   | 1 or 10 programs     | sensor/H <sub>2</sub> O | Double/CC*** | L L&L              | gas | 16 or 21 m <sup>3</sup>      | 20-30 sec  |
| TABLE TOP <b>T5</b>   | 1 or 10 programs     | sensor/H <sub>2</sub> O | Double/CC*** | S&S                | gas | 21 m <sup>3</sup>            | 20-30 sec  |


\*\*Model T2 standard coverheight 100 mm, optional cover 140 mm height

\*\*\* CC = Clean Cut, (Clean Cut)

### SPECIFICATIONS CABINET

| CABINET       | DIMENSIONS (wxDxH) | FOR TABLE TOP |
|---------------|--------------------|---------------|
| <b>PLUS-1</b> | 450 x 550 x 620    | T2 & T3       |
| <b>PLUS-2</b> | 540 x 590 x 580    | T4            |

### SEAL CONFIGURATIONS TABLE TOPS

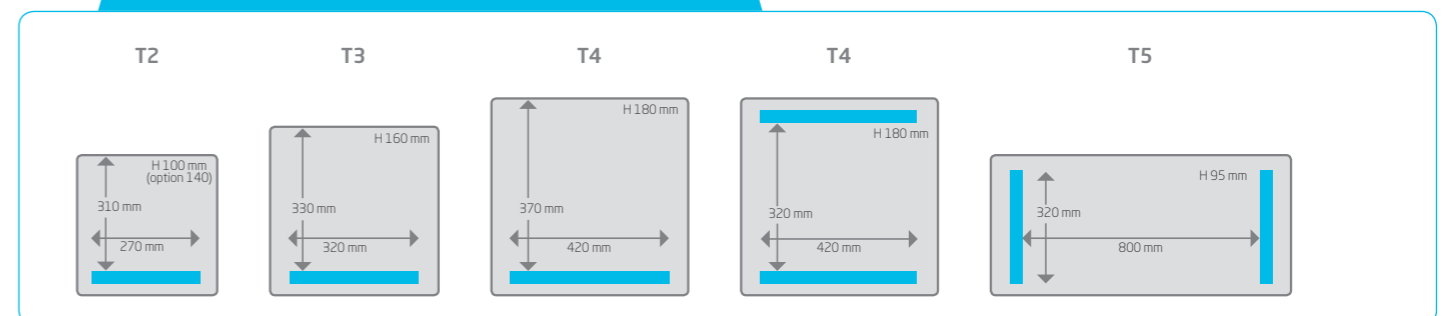

Dimensions in mm