

14

C-ONE VIVERRA

**Big autonomy
(more than 200 pallet)**
Full set of functions
Easy to drive



Technical Data

Height	2505 mm
Width	767 mm
Length	1808 mm
Weight	400 kg
Power supply	110/240 VAC
battery charger	1PH+N 50/60 Hz
Power supply machine	2 x 12V AGM batteries
Power absorption	1 kW or 25 Ah


C-One **Viverra**

A clever wrapper always at your side

Viverra is a latin word that means ferret, a mammal famous to be very quick and lively. This is the way we think about C-One Viverra: a quick and always ready machine that can actively improve the packaging process of its owner. Thanks to its big autonomy, it is a perfect machine to deal with big workloads, while the many features of its software allows a plenty of solutions for all wrapping needs.


C-One Viverra driving system makes this machine very stable and easy to move. Despite its dimensions the area which is necessary for wrapping cycle is quite small.

C-One Viverra is a perfect candidate to be your next "pet".

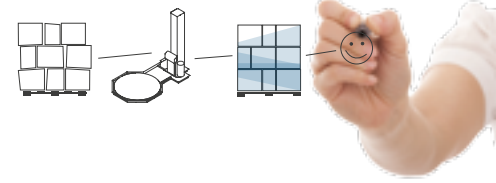

Product Specifications

- > Electronic printed circuit board for the management of the cycle
- > Frequency controller for rotation speed adjustment (from 1,8 km/h to 4,9 km/h)
- > Frequency controller for carriage speed adjustment (speed going up and speed going down can be set differently)
- > Maximum wrapping height: 2400 mm
- > Maximum size of the pallet: unlimited
- > Electromagnetic brake for film stretching
- > Photocell for pallet height detection
- > Safety stop at the base of machine
- > Power board ip54
- > Touch screen
- > Main parameters protected by password
- > Main parameters adjustable by the control panel: cycle selection, bottom wraps, top wraps, rotation speed, carriage speed going up, carriage speed going down, film tension, photocell delay, starting height
- > Reinforcing operation
- > Working cycles: up/down; topsheet; only ascent; only down
- > 20 programs can be saved by the customer
- > 3 working ways: manual, semiautomatic, fixed height
- > Acoustic warning at the cycle beginning and stop
- > Battery charge monitoring and warning message on the display when the battery is low
- > Touching wheel with quick height adjustment
- > Autodiagnostic
- > Advanced battery charger with efficiency > 85%, charging process fully controlled by microprocessor, automatic reset after connecting a new battery, protection against polarity inversion and short circuits, autodiagnostic, compensation of the voltage drop on the battery cables, normally closed power contact
- > Powder coating
- > Braked arm at the end of the cycle
- > 2 years warranty

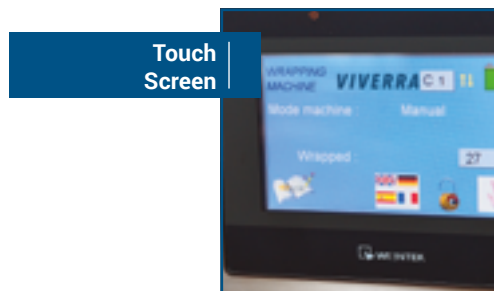

Touch Screen



Easy to Drive

Main Options

- | | |
|----------------------------|--------------------------|
| Power pre-stretch carriage | 3000 mm mast |
| Flashing lamp | Auto cut-off |
| Stop at 0 position | Photocell for dark loads |
| Double wheel | |



Power Pre-Stretch Carriage